


MSZ-A SERIES

MSZ-AP15/20VF



Introducing a compact and stylish indoor unit with various capacity, designed to match number of rooms. High performance indoor and outdoor units enabled to achieve "Rank A⁺⁺⁺" for SEER. *MSZ-AP25/35VG

High energy saving

sumption in a wide range.



All models in the series, from the low-capacity 25 to the high-capacity 50, have achieved either the "Rank A+++" or "Rank A++" for SEER and SCOP as energy-savings rating. Our air conditioners are contributing to reduce energy con-








Compact and stylish

15/20 class are for multi-systems and 25-50 class are introduced as single-split and multi-systems. From small rooms to living rooms, it is possible to coordinate residences with a unified design.

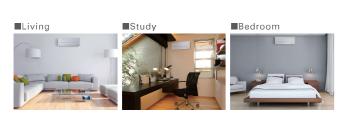



Evolved comfortable convenience function

Horizontal Airflow



the ceiling eliminates the uncomfortable up and down using the remote controller. drafty feeling.

Auto Vane Control



The new airflow control which spreads across Auto vanes can be moved left and right, and


The Function



High performance and compact size are realised by refining all parts



Vertical and Horizontal Vane





Line Flow Fan

New line flow Fan is 122% larger and 108% wider than the previous model, leading to higher aerodynamic performance. Also, same sound level as the

previous model.




Heat Exchanger

New ø5 Heat exchanger enables to realise 32% thinner depth than the previous model. It realises low pressure

loss leading to high performance.






"Weekly Timer"



Easily set desired temperatures and operation start/stop times to match lifestyle patterns. Reduce wasted energy consumption by using the timer to prevent forgetting to turn off the unit and eliminate temperature setting adjustments.

■ Example Operation Pattern (Winter/Heating mode)

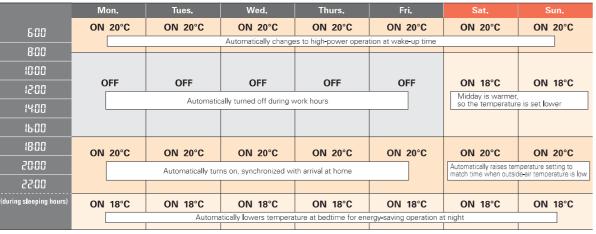


Settings

Pattern Settings: Input up to four settings for each day

Settings: •Start/Stop operation •Temperature setting *The operation mode cannot be set.

■ Easy set-up using dedicated buttons -




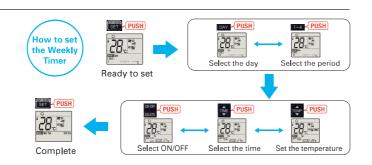

Start by pushing the "SET" button and follow the instructions to set the desired patterns. Once all of the desired patterns are input, point the top end of the remote controller at the indoor unit and push the "SET" button one more time. (Push the "SET" button only after inputting all of the desired patterns into the remote controller memory. Pushing the "CANCEL" button will end the set-up process without sending the operation patterns to the indoor unit.
It takes a few seconds to transmit the Weekly Timer operation patterns to the indoor unit. Please continue to point the remote controller at the indoor unit until all data has been sent.
When "Weekly Timer" is set, temperature can not be set 10°C. (only for 15/20 models)


Low Standby Power

Electrical devices consume standby power even when they are not in actual use. While we obviously strive to reduce power consumption during actual use, reducing this wasted power that cannot be seen is also very important.

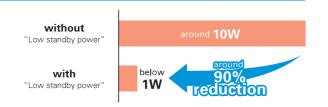


Air Purifying Filter

This filter generates stable antibacterial and deodourising effects. The size of the three-dimensional surface has been increased as well, enlarging the filter capture area. These features give the Air Purifying Filter better dust collection performance than conventional filters. The superior air-cleaning effectiveness raises room comfort yet another level.

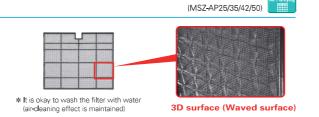

"i save" Mode

"i save" is a simplified setting function that recalls the preferred (preset) temperature by pressing a single button on the remote controller. Press the same button twice in repetition to immediately return to the previous temperature setting. Using this function contributes to comfortable, waste-free operation, realising the most suitable air conditioning settings and saving on power consumption when, for example, leaving the room or going to bed.

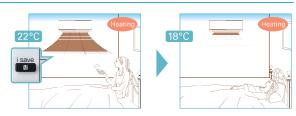

* Temperature can be preset to 10°C when heating in the "i-save" mode. (only for 15/20 models)

Outdoor Units for Cold Region

(MSZ-AP25/35/42/50)

Single split-type outdoor units are available in both standard and heater-equipped units. An electric heater is installed in each unit to prevent freezing in cold outdoor environments.



Night Mode


(MSZ-AP25/35/42/50)



When Night Mode is activated using the wireless remote controller, air conditioner operation will switch to the following settings.

- \bullet The brightness of the operation indicator lamp will become dimmer.
- The beeping sound will be disabled.
- The outdoor operating noise will drop to 3dB lower than the rated operating noise specification.

*The cooling/heating capacity may drop.

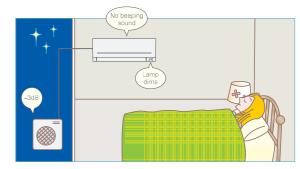

Quiet Operation

The indoor unit noise level is as low as 19dB for AP Series, offering a peaceful inside environment.



Built-in Wi-Fi Interface


(MSZ-AP25/35/42/50VGK)



The indoor unit is equipped with a Wi-Fi Interface inside an exclusive pocket in the unit.

This eliminates the need to install a Wi-Fi interface, and also contributes to the beautiful appearance since the interface is hidden.

21 22

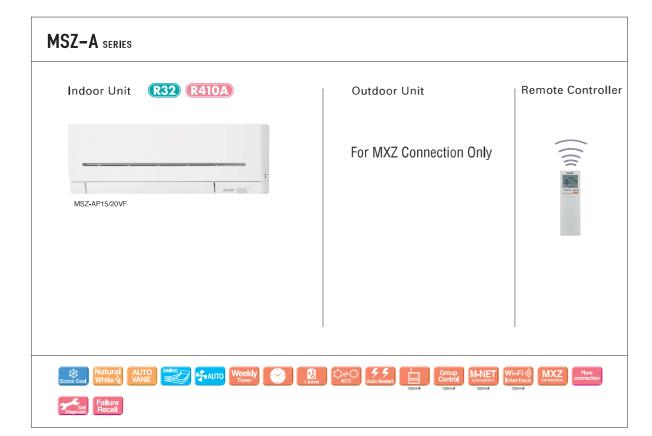

Туре						Inverter F	leat Pump					
Indoor Ur	nit			MSZ-AP15VF	MSZ-AP20VF	MSZ-AP25VG(K)	MSZ-AP25VG(K)	MSZ-AP35VG(K)	MSZ-AP35VG(K)			
Outdoor Unit				onnection	MUZ-AP25VG	MUZ-AP25VGH	MUZ-AP35VG	MUZ-AP35VGH				
Refrigerar				101 101/2 0	OTTRECTION			WOZ-AI 33VG	10102-74 33VG11			
Power Source			Single: R32 ⁽¹⁾ / Multi: R410A or R32 ⁽¹⁾ Outdoor Power supply									
Supply		ana / Ha)		Outdoor Fower suppry 230/Sincle/50								
опри	Outdoor (V / Phase / Hz) Design load kW		kW	250/single/50								
Cooling	Annual electricity consumption (*2)		kWh/a	-	-	101	101	142	142			
	SEER (*4) Energy efficiency class		KVVIVA			8.6	8.6	8.6	8.6			
				-	-	Δ+++	A+++	0.0 A+++	A+++			
		Rated	kW	-	-	2.5	2.5	3.5	3.5			
	Capacity	Min-Max	kW	-	-	0.9-3.4	0.9-3.4	1,1-3,8				
	T. 1.11		_			0.9-3.4		0.990	1.1-3.8			
	Total Input Rated		kW	=	-		0,600	· ·	0,990			
	Design load		kW	-	-	2.4 (-10°C)	2.4 (-10°C)	2.9 (-10°C)	2.9 (-10°C)			
	Declared Capacity	at reference design temperature		-	-	2,4 (-10°C)	2.4 (-10°C)	2,9 (-10°C)	2.9 (-10°C)			
		at bivalent temperature	kW	-	-	2.4 (-10°C)	2.4 (-10°C)	2.9 (-10°C)	2.9 (-10°C)			
		at operation limit temperature	kW	-	-	2.4 (-15°C)	2.2 (-20°C)	2.6 (-15°C)	2.4 (-20°C)			
Heating	Back up heating		kW	-	-	0.0 (-10°C)	0.0 (-10°C)	0.0 (-10°C)	0.0 (-10°C)			
(Average Season) ^(*5)	Annual electricity	consumption (4)	kWh/a	-	-	698	703	862	873			
Season).	SCOP (*4)			-	-	4.8	4.7	4.7	4.6			
		Energy efficiency class		•	-	A++	A++	A++	A++			
	Capacity	Rated	kW	-	-	3.2	3.2	4.0	4.0			
		Min-Max	kW	-	-	1.0-4.1	1.0-4.1	1.3-4.6	1.3-4.6			
	Total Input	Rated	kW	-	-	0,780	0,780	1,030	1,030			
Operatin	g Current (Max)		A	-	-	7.1	7.1	8.5	8.5			
			kW	0.017	0.019	0.026	0,026	0,026	0,026			
			A	0.17	0.19	0.3	0.3	0.3	0.3			
	Dimensions H*W*D		mm	250-760-178	250-760-178	299-798-219	299-798-219	299-798-219	299-798-219			
ndoor			kg	8.2	8.2	10.5	10.5	10.5	10.5			
Unit	Sound Level (SPL)	Cooling	m³/min	3.5 - 3.9 - 4.6 - 5.5 - 6.4		4.9 - 5.9 - 7.1 - 8.7 - 11.4	4.9 - 5.9 - 7.1 - 8.7 - 11.4	4.9 - 5.9 - 7.1 - 8.7 - 11.4	4.9 - 5.9 - 7.1 - 8.7 - 11.4			
		9	m³/min	3.7 - 4.4 - 5.0 - 6.0 - 6.8	3.7 - 4.4 - 5.0 - 6.0 - 7.3	4.9 - 5.9 - 7.3 - 8.9 - 12.9	4.9 - 5.9 - 7.3 - 8.9 - 12.9	4.9 - 5.9 - 7.3 - 8.9 - 12.9	4.9 - 5.9 - 7.3 - 8.9 - 12.9			
		Cooling	dB(A)	21 - 26 - 30 - 35 - 40	21 - 26 - 30 - 35 - 42	19 - 24 - 30 - 36 - 42	19 - 24 - 30 - 36 - 42	19 - 24 - 30 - 36 - 42	19 - 24 - 30 - 36 - 42			
	(SLo-Lo-Mid-Hi-SHi ^(*3))	Heating	dB(A)	21 - 26 - 30 - 35 - 40	21 - 26 - 30 - 35 - 42	19 - 24 - 34 - 39 - 45	19 - 24 - 34 - 39 - 45	19 - 24 - 31 - 38 - 45	19 - 24 - 31 - 38 - 45			
	Sound Level (PWL)	Cooling	dB(A)	59	60	57	57	57	57			
	Dimensions	H*W*D	mm	-	-	550-800-285	550-800-285	550-800-285	550-800-285			
	Weight		kg	-	-	31	31	31	31			
	Air Volume	Cooling	m³/min	-	-	32.2	32,2	32.2	32.2			
Outdoor		Heating	m³/min	-	-	29.8	29.8	33.8	33.8			
Unit	Sound Level (SPL)	Cooling	dB(A)	-	-	47	47	49	49			
		Heating	dB(A)	-	-	48	48	50	50			
	Sound Level (PWL)	Cooling	dB(A)	-	-	59	59	61	61			
	Operating Current (Max) A		A	-	-	6.8	6.8	8,2	8.2			
	Breaker Size		Α	-	-	10	10	10	10			
Ext. Piping	Diameter	Liquid/Gas	mm	6.35/9.52	6.35/9.52	6.35 / 9.52	6.35 / 9.52	6.35 / 9.52	6.35 / 9.52			
	Max_Length	Out-In	m	-	-	20	20	20	20			
	Max _• Height	Out-In	m	-	-	12	12	12	12			
Guarante	ed Operating	Cooling	°C	-	-	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46			
Range (O	utdoor)	Heating	°C	-	-	-15 ~ +24	-20 ~ +24	-15 ~ +24	-20 ~ +24			

^[7] Refigerart leakage contributes to climate change, Refigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerart with injurer GWP, if leaked to the atmosphere, This appliance contrains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO_i, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or diseasemble the product yourself and always ask a professional.


The GWP of R32 is 675 in the IPCC 4th Assessment Report.

[2] Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

[3] SHE Super High

[4] SEER, SCOP and other related description are based on COMMISSION DELEGATED REGULATION (EU) No.628/2011. The temperature conditions for calculating SCOP are based on "Average Season".

23

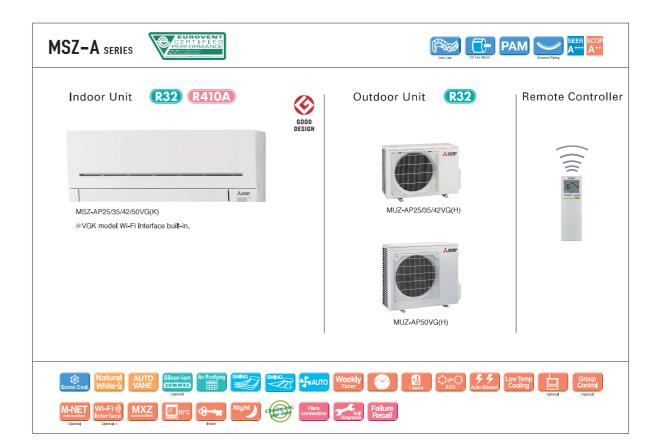

Type				Inverter Heat Pump						
Indoor Unit				MSZ-AP42VG(K)	MSZ-AP42VG(K)	MSZ-AP50VG(K)	MSZ-AP50VG(K)			
Outdoor Unit				MUZ-AP42VG	MUZ-AP42VGH	MUZ-AP50VG	MUZ-AP50VGH			
Refrigera	nt				Single: R32 ^(*1) / M	fulti: R410A or R32 ⁽¹⁾				
Power Source				Outdoor Power supply						
upply	Outdoor (V / Phase / Hz)			230/Single/50						
	Design load k			4.2	4.2	5.0	5.0			
	Annual electricity consumption (*2)		kWh/a	188	188	236	236			
	SEER (14)			7.8	7.8	7.4	7.4			
	Energy efficiency class		5	A++	A++	A++	A++			
	Oit	Rated	kW	4.2	4.2	5.0	5.0			
	Capacity	Min-Max	kW	0.9-4.5	0.9-4.5	1.4-5.4	1.4-5.4			
	Total Input	Rated	kW	1,300	1,300	1,550	1,550			
	Design load		kW	3.8 (-10°C)	3.8 (-10°C)	4.2 (-10°C)	4.2 (-10°C)			
		at reference design temperature	kW	3.8 (-10°C)	3,8 (-10°C)	4.2 (-10°C)	4.2 (-10°C)			
	Declared Capacity	at bivalent temperature	kW	3.8 (-10°C)	3.8 (-10°C)	4.2 (-10°C)	4.2 (-10°C)			
	Jupacity	at operation limit temperature	kW	4.2 (-15°C)	3.8 (-20°C)	4.7 (-15°C)	4.2 (-20°C)			
Heating (Average Season) ^(*8)	Back up heating capacity		kW	0.0 (-10°C)	0.0 (-10°C)	0.0 (-10°C)	0.0 (-10°C)			
	Annual electricity consumption (*2)		kWh/a	1120	1134	1250	1275			
	SCOP (4)			4.7	4.6	4.7	4.6			
		Energy efficiency class	5	A++	A++	A++	A++			
		Rated	kW	5.4	5.4	5.8	5.8			
	Capacity	Min-Max	kW	1.3-6.0	1.3-6.0	1.4-7.3	1.4-7.3			
	Total Input	Rated	kW	1,490	1,490	1,600	1,600			
peratin	g Current (Max)		A	9.9	9.9	13.6	13.6			
	Input	Rated	kW	0,032	0.032	0.032	0.032			
	Operating Current(Max)		A	0.3	0.3	0.3	0.3			
	Dimensions H*W*D		mm	299-798-219	299-798-219	299-798-219	299-798-219			
	Weight		kg	10.5	10.5	10.5	10.5			
ndoor Jnit	Air Volume (SLo-Lo-	Cooling	m³/min	5.4 - 6.5 - 7.7 - 9.3 - 11.4	5.4 - 6.5 - 7.7 - 9.3 - 11.4	6.0 - 7.2 - 8.4 - 10.0 - 12.6	6.0 - 7.2 - 8.4 - 10.0 - 12.6			
Jille	Mid-Hi-SHi ^(*3) (Dry/Wet))	Heating	m³/min	5.3 - 6.1 - 7.7 - 9.4 - 14.0	5.3 - 6.1 - 7.7 - 9.4 - 14.0	5.6 - 6.5 - 8.2 - 10.0 - 14.0	5.6 - 6.5 - 8.2 - 10.0 - 14.0			
	Sound Level (SPL)	Cooling	dB(A)	21 - 29 - 34 - 38 - 42	21 - 29 - 34 - 38 - 42	28 - 33 - 36 - 40 - 44	28 - 33 - 36 - 40 - 44			
	(SLo-Lo-Mid-Hi-SHi ^(*3))	Heating	dB(A)	21 - 29 - 35 - 40 - 45	21 - 29 - 35 - 40 - 45	28 - 33 - 38 - 43 - 48	28 - 33 - 38 - 43 - 48			
	Sound Level (PWL)	Cooling	dB(A)	57	57	58	58			
	Dimensions	H*W*D	mm	550-800-285	550-800-285	714-800-285	714-800-285			
	Weight		kg	35	35	40	40			
	Air Volume	Cooling	m³/min	30.4	30.4	40.5	40.5			
	All Volume	Heating	m³/min	32.7	32.7	40.5	40.5			
Outdoor Init	Sound Level (SPL)	Cooling	dB(A)	50	50	52	52			
	Sound Level (SPL)	Heating	dB(A)	51	51	52	52			
	Sound Level (PWL)	Cooling	dB(A)	61	61	64	64			
	Operating Current (Max)		A	9.6	9.6	13,3	13,3			
	Breaker Size		A	10	10	16	16			
Ext. Piping	Diameter	Liquid/Gas	mm	6.35 / 9.52	6.35 / 9.52	6.35 / 9.52	6.35 / 9.52			
	Max _• Length	Out-In	m	20	20	20	20			
	Max.Height	Out-In	m	12	12	12	12			
Guaranteed Operating Range (Outdoor)		Cooling	℃	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46			
		Heating	°C	-15 ~ +24	-20 ~ +24	-15 ~ +24	-20 ~ +24			

regy consumption based on standard less results. Actual timing various injustions are described in the Sucre High It Sucre High EER, SCOP and other related description are based on COVMISSION DELEGATED REGULATION (EU) No.626/2011. The temperature conditions for calculating SCOP are based on "Average Season". fease see page 63 for heating (warmer season) specifications.